


How to Enroll Wireless Accessories To Rechargeable Motorized Cylinder

- Launch the app on master mobile phone and connect to the motorized cylinder.
- Go to settings and touch to “add new controller” button.
- You will hear a long warning signal from motorized cylinder. After warning signal either; Short-circuit and than open-circuit yellow and black cables of home-automation interface or Short-circuit and than open-circuit yellow and red cables of home-automation interface.
- If the enrollment is successful, you will hear two short tones from motorized cylinder and it will be locked or unlocked.

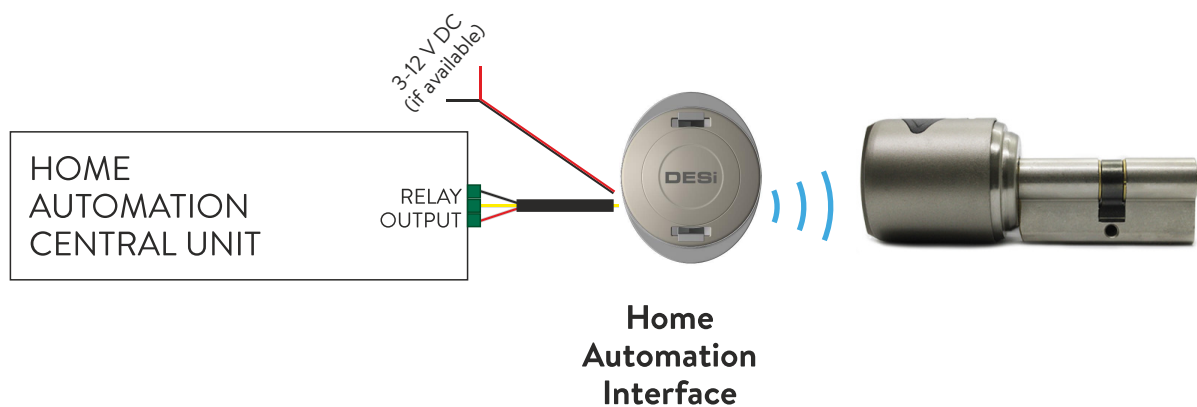

For further operations:

- Short-circuit and than open-circuit yellow and green cables to unlock.
- Short-circuit and than open-circuit yellow and blue cables to lock.

NOTE:

If available, you can connect power cable to 3 to 12 V DC instead of using CR2032 battery. If there is a battery installed to device, do not connect power cables to power source before removing the battery.

TECHNICAL SPECIFICATIONS:

Power: 4 - 12 V DC

Current Consumption: Up to 30 mA

Temperature Range: 0 - 40 °C

Controlling Range: Up to 15 m (Highly depended on environmental conditions)